



1 . TECHNICAL DATA:

DISPLAY CONTENT:11NUMBERS+2RADIX POINT +29PROMPTS BACKLIGHT COLOR:WHITE
 OPERATNIG VOLTAGE:3.3±0.2V BACKLIGHT CURRENT:<60mA(3.0V)
 DRIVING MODE :1/3BIAS,1/4DUTY
 VIEWING ANGLE:12:00
 CHARACTER HEIGHT:4.0mm, 5.8mm, 3.0mm, 15.7mm, 7.9mm, 5.8mm
 DISPLAY TYPE:VA, NEGATIVE
 DISPLAY TYPE:TRANSMISSION
 CONNECTION WAY:METAL PIN
 OPERATING TEMPERATURE:-30~+80°C
 STORAGE TEMPERATURE:-40~+90°C

2 LCD OUTLINE SIZE :

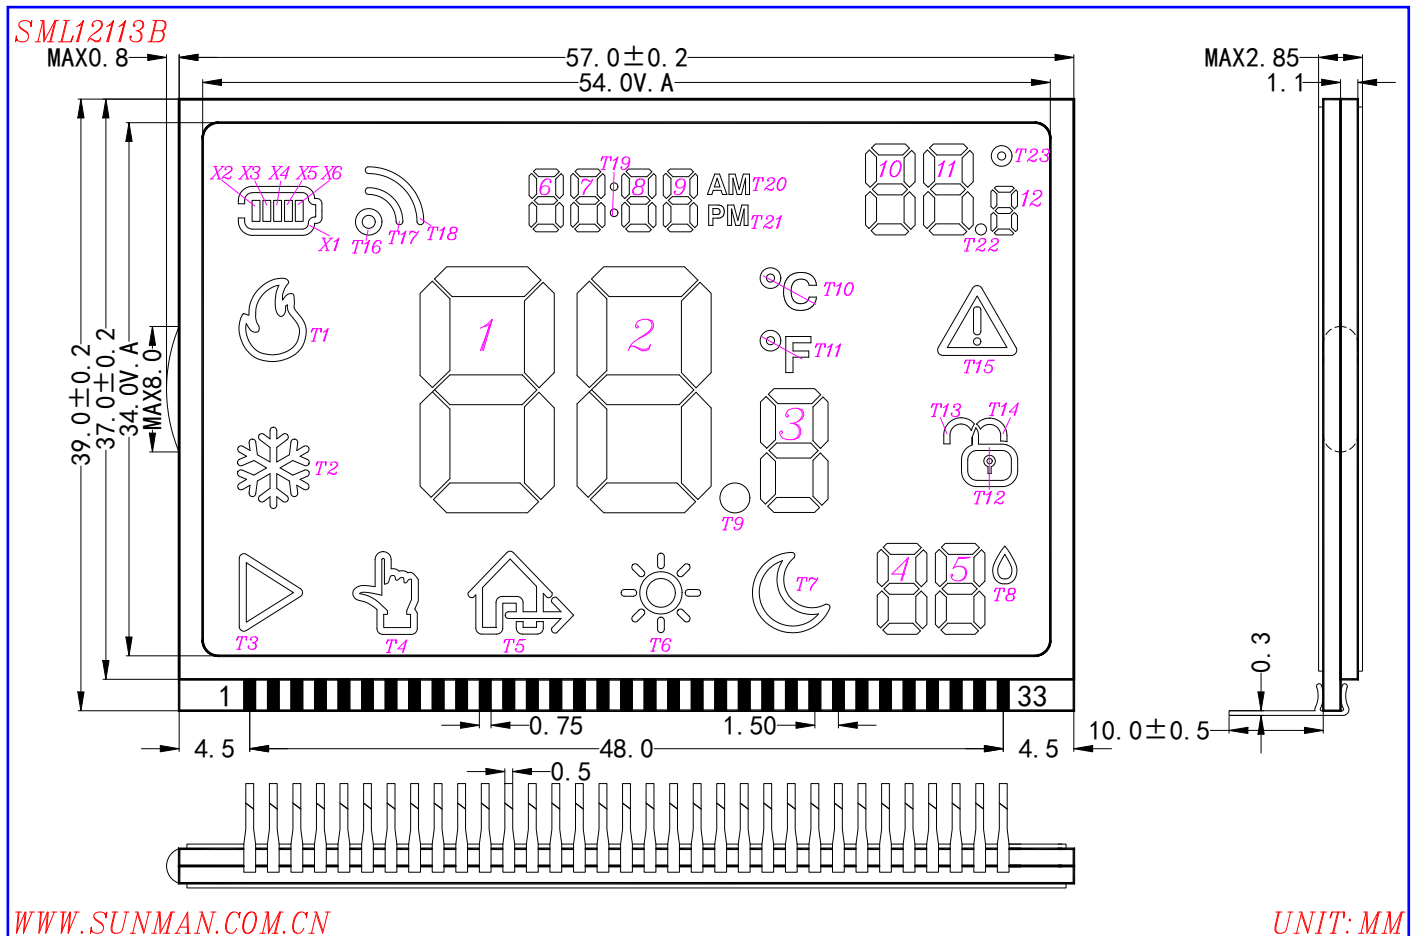

3 ALL DISPLAY STATUS:

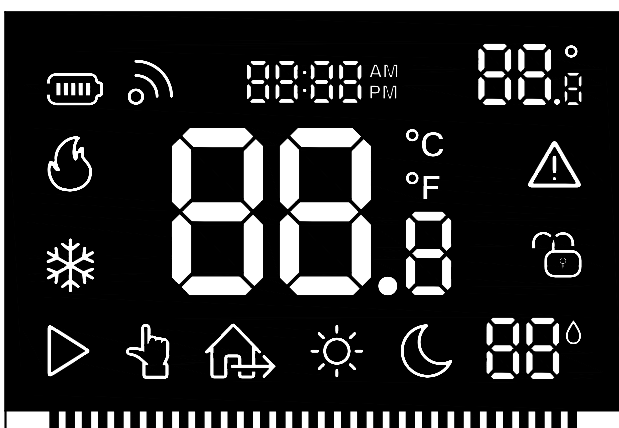


4 PIN INSTRUCTION:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
COM1	COM1	\	\	\	X1	T4	1A	T10	2A	T9	3A	T11	4A	\	5A	T8	6A
COM2	\	COM2	\	\	T1	T5	1F	1B	2F	2B	3F	3B	4F	4B	5F	5B	6F
COM3	\	\	COM3	\	T2	T6	1E	1G	2E	2G	3E	3G	4E	4G	5E	5G	6E
COM4	\	\	\	COM4	T3	T7	1D	1C	2D	2C	3D	3C	4D	4C	5D	5C	6D

PIN	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	
COM1	\	7A	T19	8A	T20	9A	T21	10A	\	11A	T22	12A	T23	T13	X6	X5	
COM2	6B	7F	7B	8F	8B	9F	9B	10F	10B	11F	11B	12F	12B	T12	T18	X4	
COM3	6G	7E	7G	8E	8G	9E	9G	10E	10G	11E	11G	12E	12G	T14	T17	X3	
COM4	6C	7D	7C	8D	8C	9D	9C	10D	10C	11D	11C	12D	12C	T15	T16	X2	

5 BACKLIGHT SIZE:

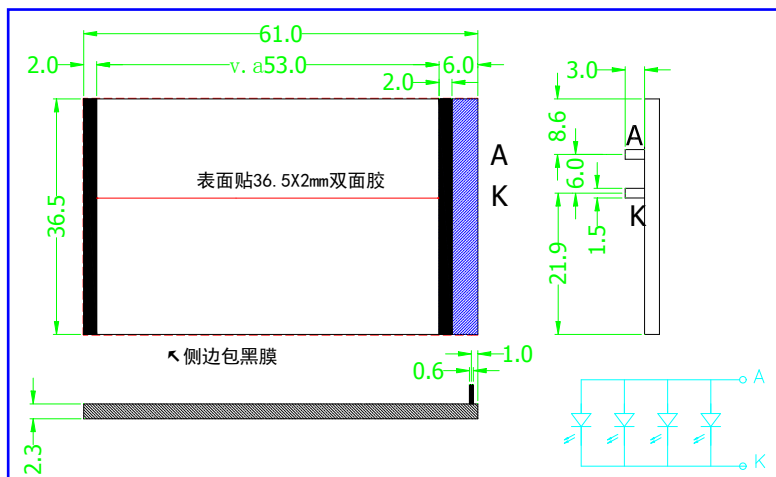

6 LCD+BACKLIGHT Assembly photos:

